

TRANSFORMER FOR DIN RAIL

PTM




Encased protection transformers designed mainly for fitting into devices using T-35 bus. Elegant casing, featuring spring bracket significantly facilitates and speeds up attaching. The transformers are made with Class II insulation and protection grade IP21. Maximum ambient temperature 40°C, thermal class of insulation B (130°C). Manufactured in compliance with EN 61558-2-4 and EN 61558-2-6.



Rated power: 100 - 320 VA

Rated voltage PRI: 110 - 400 V 50/60 Hz

Rated voltage SEC: 6 - 250 V

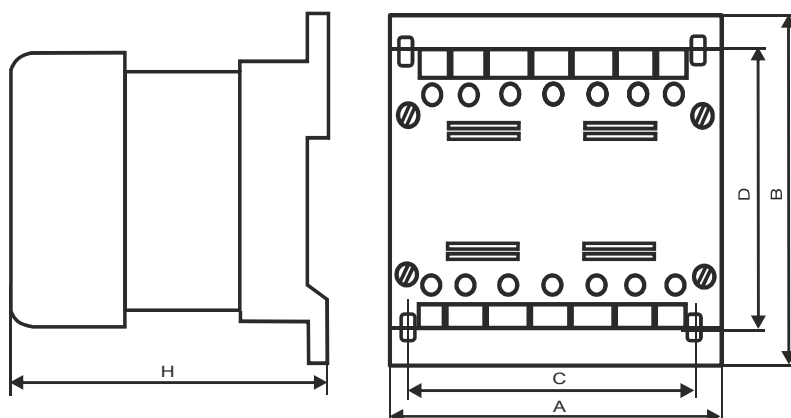

| Type | Power [VA] | Dimensions [mm] | | | | | Weight [kg] |
|---------|---------------|-----------------|-----|----|-----|-----|----------------|
| | | A | B | C | D | H | |
| PTM 100 | 100 | 90 | 106 | 69 | 90 | 106 | 1,90 |
| PTM 120 | 120 | 90 | 106 | 69 | 90 | 116 | 2,30 |
| PTM 250 | 250 | 126 | 136 | 96 | 121 | 117 | 4,40 |
| PTM 320 | 320 | 126 | 136 | 96 | 121 | 127 | 5,30 |

Because of the constant development of product construction and changes concerning technical requirements, Breve-Tufvassons Company reserves the right to change the parameters mentioned above.